

LED EDGE-LIT 900 Series
■ LED Exits

STANDARD FEATURES

- Recessed mounting and universal style enclosures
- Attractive aluminum extrusion design
- Standard available colors: Black, White, and Brushed Aluminum
- Optional Brushed Brass finish available
- Red or Green Superbright LEDs
- Constant, Uniform Illumination
- High clarity, optically true acrylic panels
- 6" characters with 3/4" stroke or 8" characters with 1" stroke
- Specify arrow configuration when ordering
- Mirror background supplied as standard for all double face signs
- 120/277V dual primary 60Hz input .051/.022 amps
- Short circuit protection
- Voltage surge protection
- 25 year warranty
- 7 year full warranty on battery

BATTERY BACK-UP


- Automatic diagnostic tester available
- Trickle charge circuitry for extended battery life.
- Overcharge protection provided by zener diode
- Test button and LED AC/DC indicator conveniently located for easy testing and visual inspection.
- Flasher/buzzer options meet ADA regulations
- Low voltage disconnect eliminates deep discharge
- Brown-out protection
- UL recognized maintenance-free lead acid battery
- ETL listed 90 minute emergency run time. 24 hour recharge time

ENERGY EFFICIENT

Starting at only 1 Watt AC and just 4 Watts with battery back-up, The Exit Store's 900 series will save up to 95% of energy costs over conventional bulb signs.

MAINTENANCE-FREE

Never change another bulb for years! High quality LEDs are rated for an 8-10 year life, cutting bulb replacement costs 100%. With The Exit Store quality, you can install it and forget it!

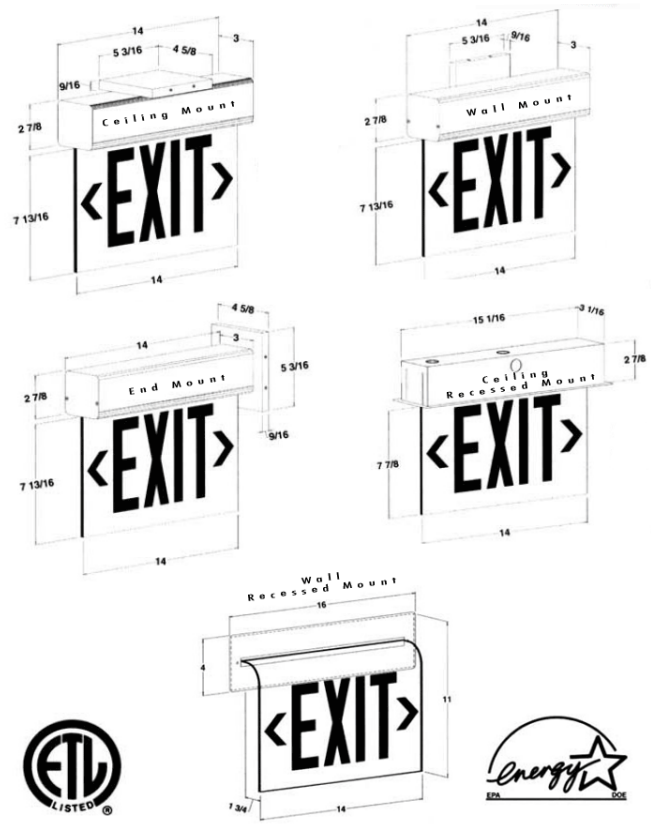



900

LED EDGE-LIT 900 Series

ORDERING INFORMATION

DESCRIPTION: 900 (6" Single Face), Universal Mount, Less Battery, Red Letters/Clear Panel, No Chevrons, Black Enclosure, 12Volt DC Remote Emergency

Power

Series	Panel Size	Mounting	Power Source	Panel Color	Chevrons	COLOR	Options
900							
<ul style="list-style-type: none"> 902 (Single face) 903 (Double face) 	<ul style="list-style-type: none"> Blank (6") (Standard) NY (8") 	<ul style="list-style-type: none"> R (Recessed) WR (Wall Recessed) U (Ceiling End or Universal Wall Mount) 	<ul style="list-style-type: none"> LB (Less Battery) WB (With Battery) <p>Optional:</p> <ul style="list-style-type: none"> NC (Nickel Cad) TF (10 Hr. Run Time in flash/5 in continuous) 	<ul style="list-style-type: none"> RC (Red Letters) RW (Red Letters w/White Panel) GC (Green Letters w/Clear Panel) GW (Green Letters w/White Panel) RM (Red Letters w/Mirror Panel) GM (Green Letters w/Mirror Panel) SS (Special Screening-Optional) 	<ul style="list-style-type: none"> Single Face: <ul style="list-style-type: none"> CL (Chevron Left) CR (Chevron Right) BC (Both Chevrons) Double Face: <ul style="list-style-type: none"> SC (Single Chevron) BC (Both Chevrons) ZC (No Chevrons) 	<ul style="list-style-type: none"> WH (White) BL (Black) BA (Brushed Aluminum) <p>Optional:</p> <ul style="list-style-type: none"> BB (Brushed Brass - Additional cost) 	<ul style="list-style-type: none"> AT (Automatic Diagnostic Tester) FL (Flasher) BZ (Buzzer) A1 (Fire Alarm Interface w/Flasher) A2 (Fire Alarm Interface w/Flasher & Buzzer) 6V (6Volt DC Remote-Emergency Power) 12V (12V DC Remote Emergency Power) 2CI1 (2 AC Circuit Inputs 120V/277V) 2CI17 (2 AC Circuit Inputs 277V/277V) E1 (12" Pendant Mount Kit) E2 (24" Pendant Mount Kit) E12 (12" Extension Rod) E24 (24" Extension Rod) EL1 (One 6V Emergency Light Remote Mounted)

EXAMPLE: 902-U-LB-RC-ZC-BL-12V

(SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE.)

*Mirror background supplied as standard for all double laced signs.

BRIGHT, UNIFORM ILLUMINATION

High intensity, Super bright red LEDs and True Green LEDs provide superior brightness and uniformity.



CUSTOM MESSAGES

The Exit Store can illuminate your custom message or artwork in any available LED color. Call for details.

CODE & STANDARDS COMPLIANCE

ETL Listed to meet UL 924, NEC, OSHA, and NFPA Life Safety Code illumination requirements.

AUTOMATIC DIAGNOSTIC TESTER

This multifunctional option automatically analyzes the operating condition of the sign every seventh day and provides a visual warning if failure has occurred.

INSTALLATION

Installs in minutes with easy-to-read instructions and detailed diagrams. No special hardware or tools necessary. Internally housed components and battery.