

CITY OF CHICAGO APPROVED INDUSTRIAL EMERGENCY

C8S SERIES SPECIFICATIONS

These contemporary, low profile, and economical emergency lights are ideal for most commercial and institutional installations.

CONSTRUCTION

Housing and front panel are manufactured from heavy gauge steel. Ceiling and back mount only; canopy supplied.

FINISH

White baked enamel or bronze standard. Other colors are also available.

LAMP HEADS

2 or 3 contemporary styled, adjustable PAR 36 spun aluminum heads, furnished with 12 Watt, 6 volt incandescent lamps.

BATTERY

Sealed 6 volt, maintenance free lead acid battery operates for a minimum of 120 minutes.

BATTERY CAPACITY*					
Model #	Watts	Voltage	Total No. Avail. Heads/Remotes		Housing Configuration
			2 Hours	1.5 Hours	
C8-2-24	24	6	2	3	I
C8-2-36	36	6	3	4	I


*Based on 12 Watt Lamps

CHARGING CIRCUITRY


Solid state charger features automatic brown-out protection, low voltage disconnect, momentary test switch and charge indication light, standard. Dual 120/277 volt input.




DIMENSIONS

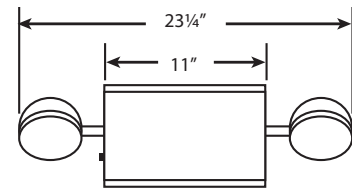

C8-2-24/36 Front View

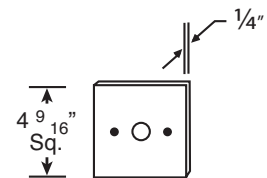

C8-2-24/36 Canopy



C8-2-24/36 Side View

DIMENSIONS					
Housing size	A	B	C	D ¹	E ²
I	11"	6.75"	2.125"	15"	24"
II	16"	12"	7.6"	18"	16"

1 TOP MT. HEADS

2 SIDE MT. HEADS

C8

ORDERING INFORMATION

Example: C822WV

C8	2	2	W	V
Series	Heads	Wattage	Finish	Options
C8	1 = 1 2 = 2 3 = 3	1 = 24 2 = 36	W = White* BR = Bronze C = Custom * = Standard	WG= Wire Guard V= Voltmeter A= Ammeter TPS= Tamper proof screws SB= Sealed Beam PAR 36 lamp SH= Shelf Mounting Kit FAI= Fire Alarm Interface H= Halogen lamp RH= Remote Heads

CODE COMPLIANCE

U.L., E.T.L., or ENTELA Listed. City of Chicago Approved.



WARRANTY

Any component that fails due to manufacturer's defect is guaranteed for 1 year from time of shipment. Battery is prorated for 5 years. Warranty does not apply to damages caused by improper installation, abuse, fire or acts of God.