

Non-Electrical Application Exits

PRODUCT OVERVIEW

- Vandal Resistant
- Operating Temperature from - 76°F TO +212°F
- Explosion Proof
- Waterproof
- No Wiring Required.
- Field Selectable Direction Arrows.
- Installs in Minutes.
- Suitable For Clean Room Applications.
- Energy Star Rated.
- No Bulb to Fail or Replace.
- Corrosion Resistant.
- Fail Safe.
- Recyclable if Returned to Manufacturer.
- Lightweight.
- 10 or 20 Year Life.
- Totally Self-Powered.
- No Batteries, No Maintenance.

SPECIFICATIONS

ILLUMINATION SOURCE

- Borosilicate (hard) glass
- Internally coated with phosphorescent powder
- Filled with Tritium gas

BRIGHTNESS

- Minimum brightness at time of manufacture of 0.15 foot lamberts.

CONSTRUCTION


- Encased in high-impact, fireretardant ABS plastic

COMPLIES WITH

- NFPA Life Safety
- Code 101
- City of Los Angeles
- State of California
- Council of American Building Officials (ICBO, SBCCI)
- OSHA
- U.L. 924
- USNRC
- ISO 9001



DIMENSIONS

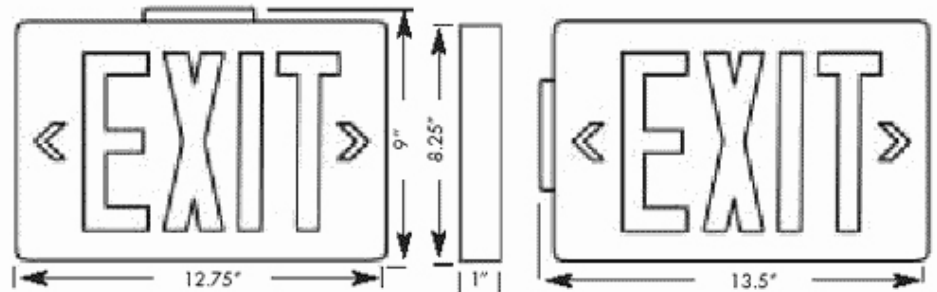

SLXT

Self Luminous

MODEL	CANOPY	FACE COUNT	FACE COLOR	HOUSING	LIFE SPAN
SLXT (Self Luminous Tritium)	U –Universal	1 (Single) 2 (Double)	R (Red) G (Green) B (Black) W (White)	B (Black) W (White)	10 (10 Years) 20 (20 Years)

Example: SLXTU1RB10



Meets or exceeds UL924 Standards and is COMPLIANCE with the following standards:

- NFPA Life Safety
- Code 101
- City of Los Angeles
- State of California
- Council of American Building Officials (ICBO, SBCCI)
- OSHA
- U.L. 924
- USNRC
- ISO 9001

