

SURFACE AND RECESSED LED EDGE-LIT EXIT SIGNS

STANDARD FEATURES

Recessed or universal mounting ▪ Compact, low profile design ▪ Standard colors, white, black, brushed aluminum ▪ Red or green super bright LEDs ▪ Field installable directional arrows ▪ Consumes less than 3 watts for AC units and less than 5 watts for battery backup units ▪ 120/277 volt operation ▪ Attractive aluminum extrusion design ▪ Constant, uniform illumination

BATTERY BACK-UP

▪ Test button and LED AC/DC indicator ▪ Overcharge protected ▪ Brown-out protected ▪ UL recognized, maintenance-free, sealed lead acid battery ▪ ETL listed 90 minute emergency run-time

ENERGY EFFICIENT

High output red or green LEDs provide superior brightness and uniformity with a service life in excess of 25 years. Energy consumption of less than 3 watts for AC only or less than 5 watts for battery back-up units.

BATTERY

Six volt, sealed, lead acid, maintenance-free and rechargeable.

HOUSING

Surface Mounting: Engineering grade aluminum extruded housing available in satin, white and black finishes. Recessed Mounting: Extruded aluminum back-box supplied with galvanized steel adjustable bar hanger assembly.

PANELS

Constructed of clear acrylic with beveled lettering for maximum light output. Exit letters are 6" high with a 3/4" stroke. Double face panels are supplied with a mirror insert. All units are supplied with press-on directional arrows for placement in all applications.

LED EDGE-LIT EXITS



Shown: V902U



Shown: V902R

DIMENSIONS

Recessed Mount




Surface Mount



ORDERING INFORMATION:

V902	R	LB	RC	WH	ZCI
SERIES	MOUNTING	POWER SOURCE	PANEL COLOR	HOUSING COLOR	OPTIONS
V902 = Single V903 = Double	R = Recessed U = Universal Surface	LB = Less Battery WB = With Battery	Single Face RC = Red Letters Clear Panel GC = Green Letters Clear Panel	WH = White BL = Black BA = Brushed Aluminum	ZCI = Dual Circuit

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE.




Press-on directional arrows allow for placement in all applications.

Double Face
RM = Red Letters
Mirror Panel
GM = Green Letters
Mirror Panel

**All V903 double face units are supplied with a mirror separator*

ELECTRICAL

120/277 VAC operation. AC on indicator light and test switch provided. Low voltage disconnect feature prevents battery from deep discharge while maintaining 90 minute code required emergency operation.

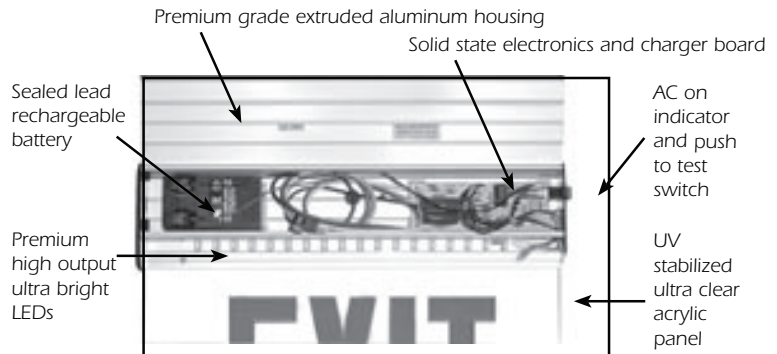

INSTALLATION

Surface Mounting: Completely universal canopy provides for side, ceiling or flush mounting. All hardware is included. Recessed Mounting: Recessed ceiling mount, accessible above the plenum. Back-box requires 14 1/2" x 29 1/16" cut out. Bar hanger assembly allows 15/16" variable depth to ensure flush fit, proper seal and eliminate light leak. Trim plate allows 3/4" adjustment range for accurate alignment. Trim plate attaches to back-box with two 1" #10 screws (provided). Electronics and battery contained in back-box. Plug-in battery connector supplied for easy installation. Hardware provided.

CONFORMS TO CODES & STANDARDS

ETL & UL Listed to Meet UL 924, NEC, OSHA, and NFPA, Life Safety Code Illumination Requirements



WARRANTY

Any component that fails due to manufacturers defect is guaranteed for 5 years with a separate 3 year pro-rated warranty on the battery. The warranty does not cover physical damage, abuse or acts of God and The Exit Store reserves the right to charge for such repairs if deemed necessary.